


FIRECEL SR 124 E 30 / E 90

IN ACCORDANCE WITH
DIN 4102-12 AND DIN VDE 0815

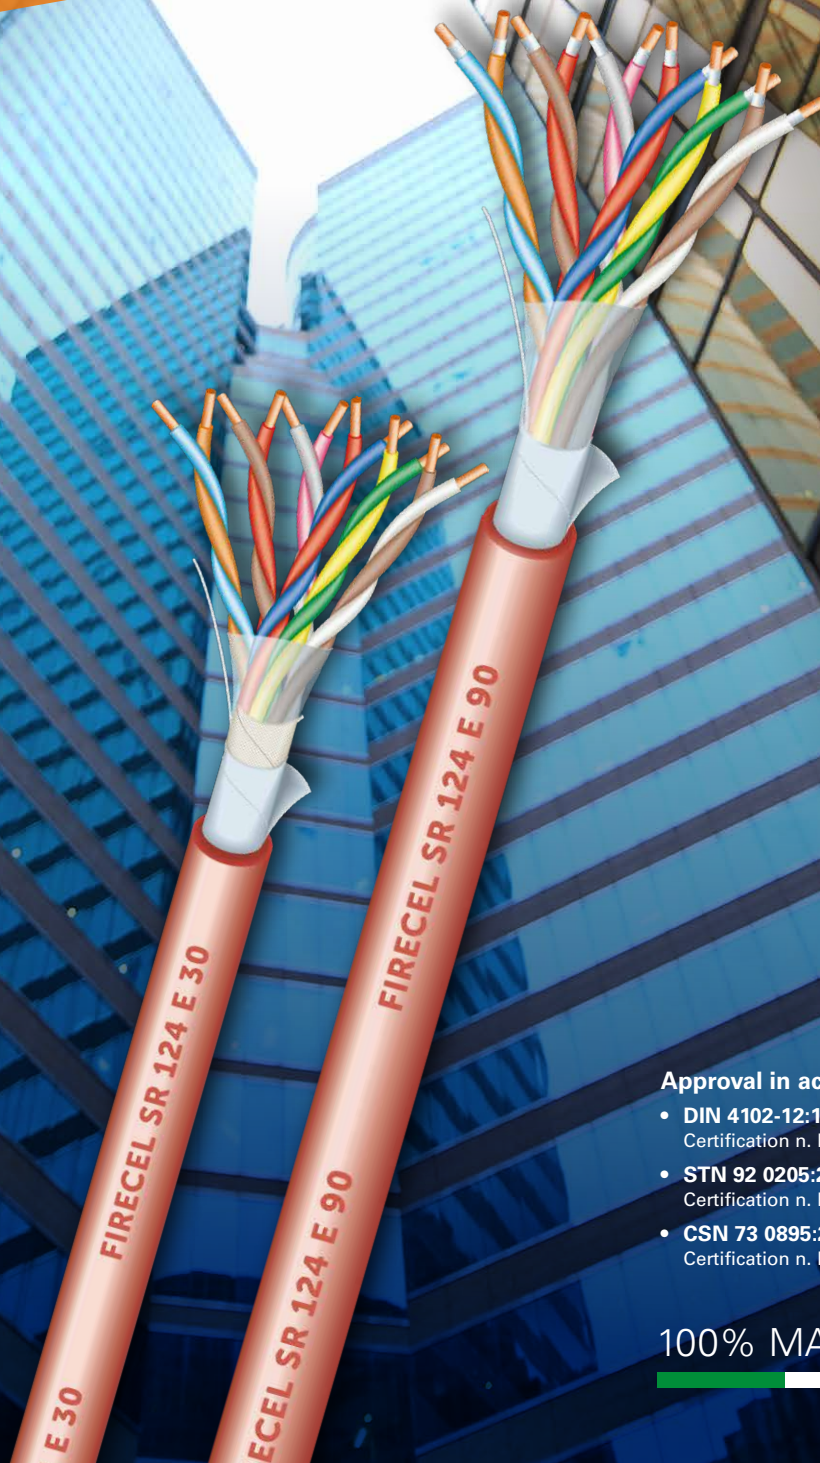

Approval in accordance with:

- **DIN 4102-12:1998-11**
Certification n. FIRES-JR-003-22-NURE
- **STN 92 0205:2014/Z1:2019**
Certification n. FIRES-JR-001-22-NURE
- **CSN 73 0895:2016**
Certification n. FIRES-JR-002-22-NURE

FIRECEL SR 124 E 30 / E 90

Multipair Overall Screen/Silicone Insulation



JE-H(St)H...Bd - FE180/E30

JE-H(St)H...Bd - FE180/E90

APPLICATIONS

Fire resistant communication cables suitable for indoor and outdoor installation, in dry and moistens areas.

These cables assure circuit integrity E30-E90 according to DIN 4102-12.

Operating voltage peak value: 225V.

OPERATING TEMPERATURE

Operating: -30/+70 °C

Installation: -5/+50 °C

MINIMUM BENDING RADIUS

7,5 times the outer diameter.

CABLE CONSTRUCTION

Conductors

Solid plain annealed copper. 0.8 mm

Insulation

Silicone rubber (E30 cables)

Silicone rubber + Mica tape (E90 cables)

Overall screen

Al/PET + PET + 0.8mm solid tinned annealed copper drain wire + glass tape (E30)

Al/PET + PET + 0.8mm solid tinned annealed copper drain wire (E90)

APPLICABLE STANDARDS

Fire resistant

DIN 4102-12

Flame retardant

EN 60332-1-2 / IEC 60332-1-2

Fire retardant

EN 60332-3-25

IEC 60332-3-25

Halogen free properties

EN 60754-1 / IEC 60754-1

EN 60754-2 / IEC 60754-2

Low smoke emission

EN 61034-2 / IEC 61034-2

Design

DIN VDE 0815

FE180 / E 30

Formation mm	Nominal diameter mm	Nominal Weight kg/km
1 x 2 x 0.8	6.4	60
2 x 2 x 0.8	7.1	70
4 x 2 x 0.8	11.4	150
8 x 2 x 0.8	12.5	210
12 x 2 x 0.8	15.1	310

FE180 / E 90

Formation mm	Nominal diameter mm	Nominal Weight kg/km
1 x 2 x 0.8	6.9	70
2 x 2 x 0.8	7.8	90
4 x 2 x 0.8	13.1	170
8 x 2 x 0.8	16.0	360
12 x 2 x 0.8	18.0	440

HEADQUARTER AND FACTORY
Via Caduti del Lavoro, 18/A 20090 Pliotello (Milano). Italy
Ph: +39 02 921 605 21
Fax: +39 02 921 607 53
e-mail: cavicel@cavicel.com

DUBAI OFFICE
Fortune Executive Tower. Office 406 - Plot n.T1 Jumeirah
Lakes Towers. Dubai - UAE
Ph: +971 4 4581199
Fax: +971 4 4581144
e-mail: middleeast@cavicel.com

HONG KONG OFFICE
2/F, AXA Southside Building
38 Wong Chuk Hang Road. Hong Kong
Ph: +852 3963 9365
e-mail: apac@cavicel.com